

Technical sheet

Description

Hanger is used as the element for quick fixing of plasterboard sections of CD60 into solid structures of buildings in the horizontal system. The product consists of three parts: SF5 buckle, SF6 buckle and wire diameter of 4mm

Use instruction

The product is used to mount plasterboard construction profile in CD 60/27 horizontal system to anchor ceilings.

Technical features

Composition


Material body: steel, wire 4 mm

Test

Reaction on fire: A1
Durability: class B



MANUFACTURED IN
COMPLIANCE WITH
EN 13 964

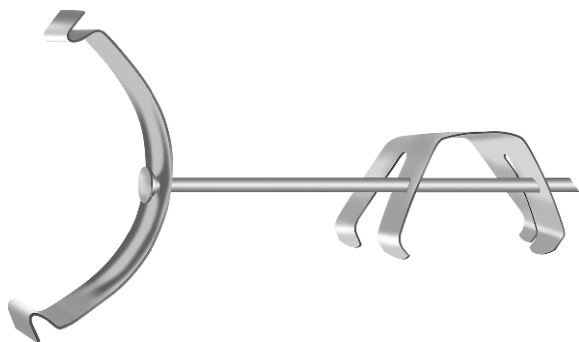

	Designation	Thickness (mm)	wire (mm) Ø	Admissible load admF [N] EN 13964	Load-bearing capacity at rupture (normal failure load)	Recommended load admf[N]	Load-bearing capacity capacity class [kN] DIN 18168-2 class [kN] DIN 18168-2
Quick hanger on spring Z2	Z2 CD	0,7	4	377	1129	150	0,15